


cudy

AX1500 Gigabit Mesh Wi-Fi 6 Router

WR1500

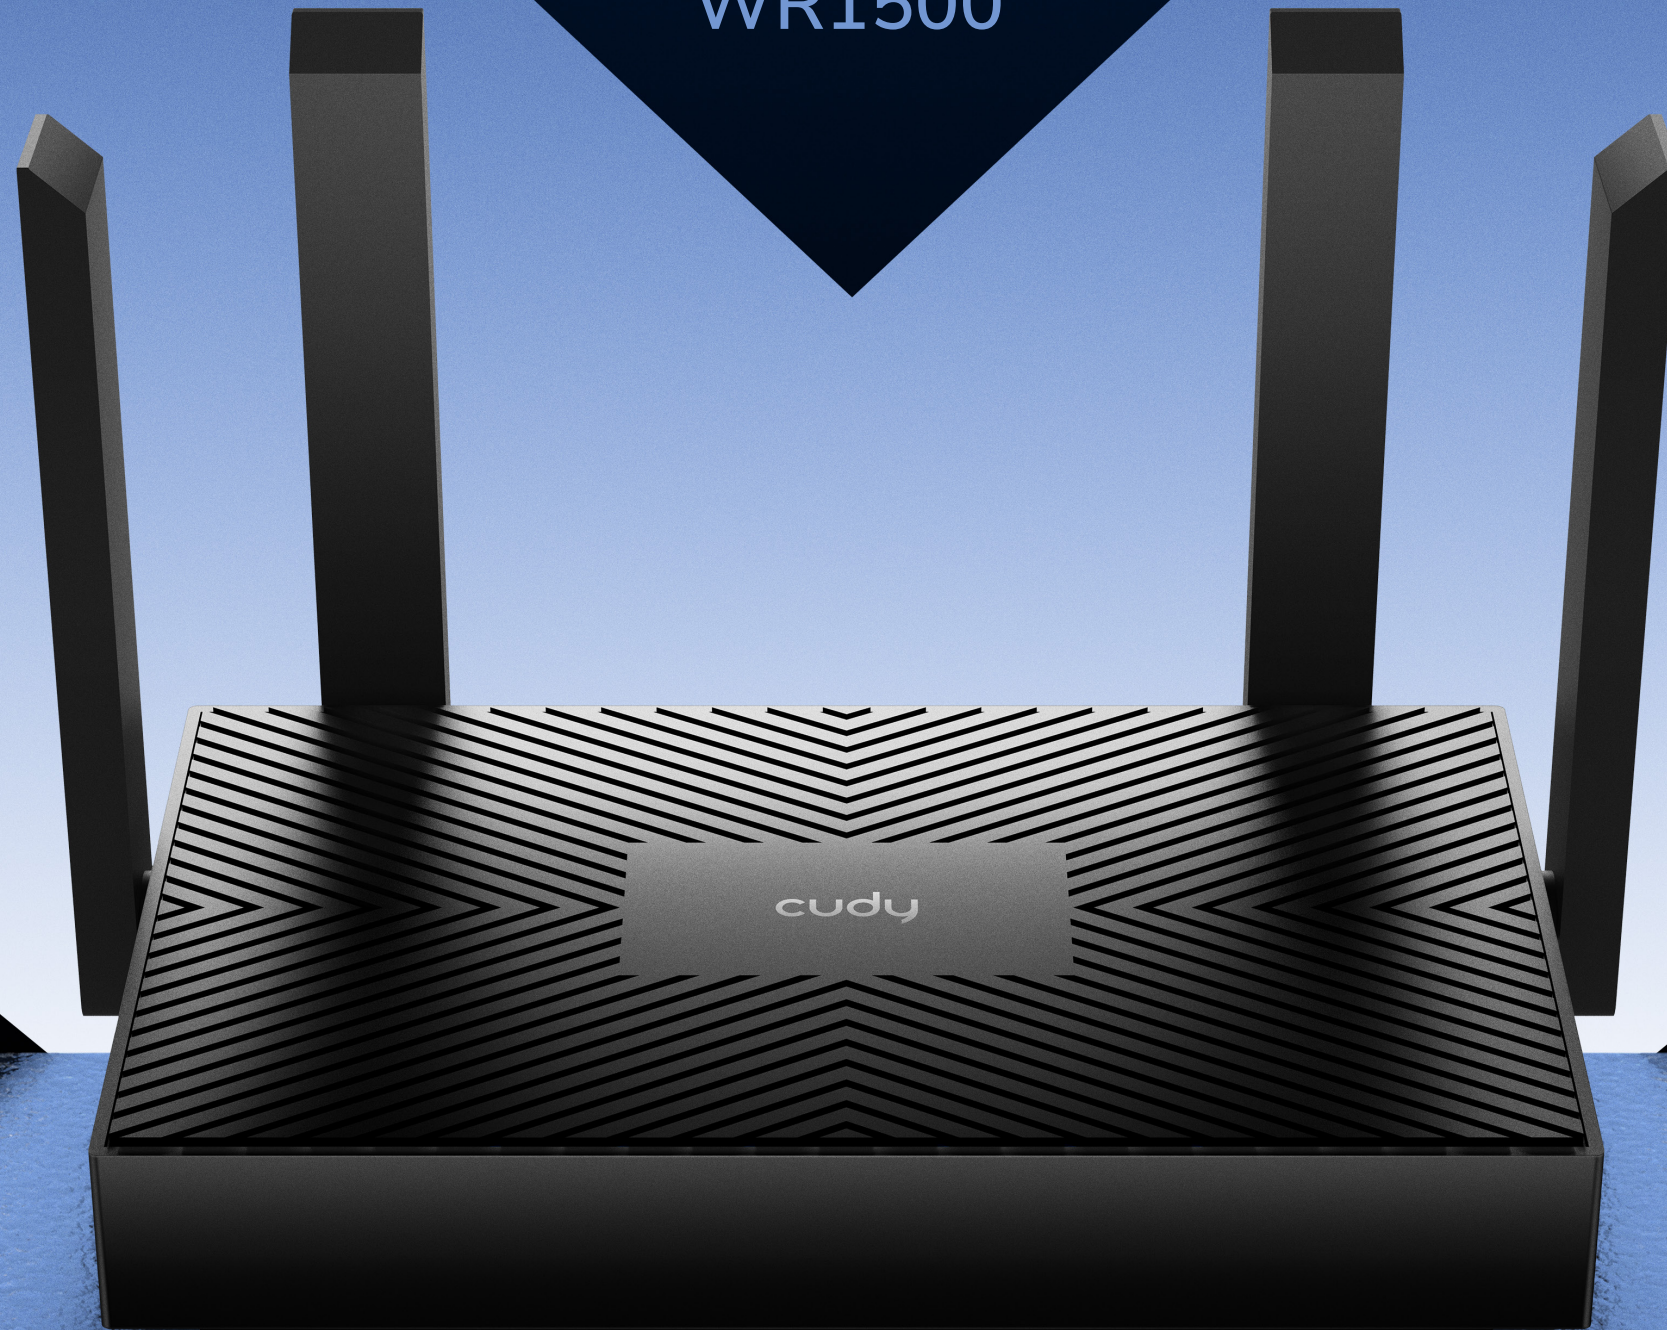

Wi-Fi 6

Next Generation WiFi 6

1000M

Ethernet Ports

AX1500

Super-Fast WiFi Speed



Dual-Band



Beamforming

Powerful Wi-Fi 6 AX1500

4X

more capacity



38%

faster with Gigabit Wi-Fi

Wi-Fi 6 / 5 GHz 1201 Mbps

Wi-Fi 5 / 5 GHz 867 Mbps

100%


backwards compatibility





Up to 1.5 Gbps Wi-Fi 6 Speed

Enjoy smooth streaming, downloading, and gaming with extremely fast Wi-Fi 6 Speed.

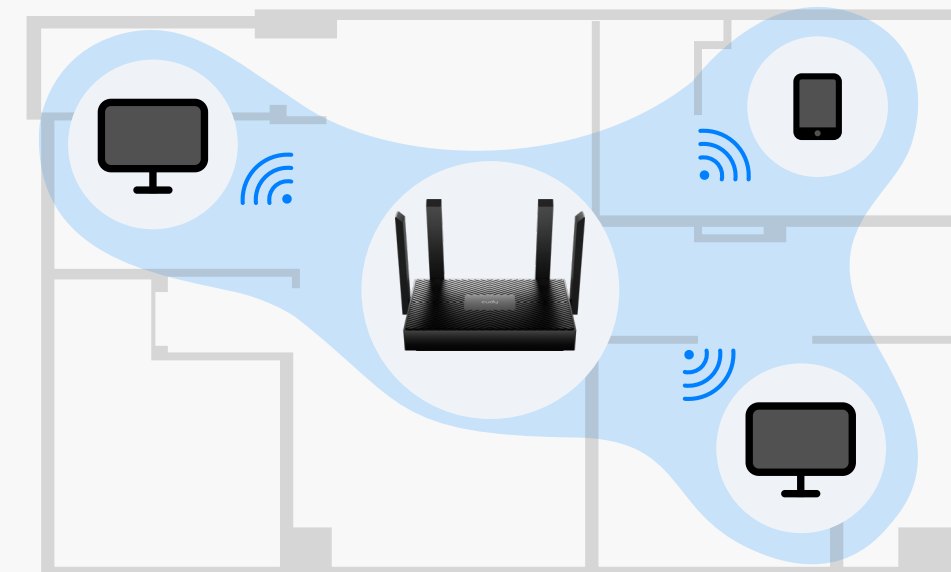

Extensive Coverage

Beamforming, and four antennas combine to deliver focused reception to devices far away.



Highlights

A Gigabit WiFi 6 router with 4 Gigabit ports, suitable for home internet up to 1000 Mbps, connecting many devices, and reducing latency.

- 4-Stream Dual-Band Wi-Fi 6
- 1201 Mbps + 300 Mbps Wi-Fi
- 4× Gigabit Ethernet Ports
- Beamforming
- 60 Connected Devices
- Covers 100m² (1,100 ft²)
- Cudy Mesh, VPN Client
- Cudy App, Cloud Control

Package Content

- WR1500
- Power Adapter
- Ethernet Cable
- Installation Guide

Hardware Specs

CPU	CPU Details	1 GHz CPU
Memory/Storage	Flash/ROM	16 MB (128 Mbit) NOR
	DDR/RAM	128 MB (1 Gbit) DDR2
Wireless	5 GHz Wi-Fi Speed	1201 Mbps
	2.4 GHz Wi-Fi Speed	300 Mbps
	5 GHz Wi-Fi Streams	2T2R (2×2 MIMO)
	2.4 GHz Wi-Fi Streams	2T2R (2×2 MIMO)
	Wi-Fi Antennas	4× Fixed
	FEM or PA/LNA	5 GHz: 2× Internal
		2.4 GHz: 2× Internal
	Beamforming	True
	Range Performance	Max: 170 m (558 ft)
		Indoor WiFi range varies depending on the layout and wall materials.
		See Wall Performance spec for placement suggestions.
	Wall Performance	Two wooden walls with thickness < 10 cm (4")
		One concrete wall with thickness < 20 cm (7")



Hardware Specs

Interfaces	Gigabit RJ45 Ports	4
	Ethernet Notes	1× WAN port, the rest are LAN ports
	LED	System
	Physical Buttons	WPS Button
		Reset Button
	Power Input	DC Jack
Power	Power Methods	DC
	DC	12V 1A
	Power Adapter	Input: 100 ~ 240 V, 50/60 Hz AC
		Output: 12V 1A DC
	Max Power Consumption (W)	10W
Reliability	Environment	Operating Temperature:
		0 °C ~ 40 °C (32 °F ~104 °F)
		Storage Temperature:
		-40 °C ~ 70 °C (-40 °F ~ 158 °F)
		Humidity:
		10% ~ 90% non-condensing
		Storage Humidity:
		5% ~ 95% non-condensing
Certifications	FCC, CE	

Mechanical	Installation	Desktop
		Wall-mount
	Dimension	183.3×109×35 mm
		7.22×4.29×1.38 inches
	Product Weight	EU: 220 g (7.76 oz.)
		ZH: 224.6 g (7.92 oz.)



Software Specs

Wireless	Wi-Fi Standards	Wi-Fi 6
	Max Wi-Fi Modulation	1024-QAM
	Max Capacity	128
	Recommended Client Upper Limit	60
	Max Wi-Fi Channel Width	80 MHz
	Wi-Fi Security	WPA/WPA2/WPA3
	WPS	True
General	Operation Modes	• Wi-Fi Router • Access Point • Range Extender • WISP • Client
	Mesh	Cudy Mesh
	Mesh Backhaul	Wireless Backhaul
		Wired Backhaul
	Multi-Band Backhaul	True
	WAN Mode	DHCP
		Static IP
		PPPOE
		PPTP
		L2TP
	Internet Failover Sequence	WAN
		WISP

Network	QoS	Per-User Rate Limiting
	DHCP	Address Reservation
		DHCP Client List
		Server
		IP Versions
		IPv4/IPv6
		Relay
	IPv6 Protocols	Dynamic (SLAAC/DHCPv6)
		Static (Fixed IP)
		Passthrough
		464XLAT
		MAP-E
		DS-Lite
		IPTV/VLAN
		Bridge
		VoIP VLAN
		Tag VLAN
	Firewall	IPTV VLAN
		SPI Firewall
	IGMP	Block PING
		IGMP Proxy
	Forwarding	IGMP Snooping
		Port Forwarding
		UPnP
		DMZ



Software Specs

Utilities	VPN Client	PPTP
		L2TP
		Wireguard
	DNS Options	Manual DNS
		Rebind Protection
		Override Clients' DNS
	Online Detection	True
Management	All Devices Management	Wake on LAN
		True
		True
	Per-Devices Management	Wi-Fi Time Schedule
		MAC Filter
		IP/MAC Binding
		Internet On/Off
System	Local Control Method	VPN On/Off
		Online Time Schedule
		Device Rename
	Remote Control Method	Content Management
		Domain Filter
		IP Filter
		Config Web Page
	App Control	Config Page via HTTPS
		App Control
	TR069/TR098/TR111/TR181	

System	Firmware Upgrade	Local Update		
		App (Over the Air)		
		Online Update		
	Reliability	Timed Reboot		
		Backup and Restore		
	Diagnostic Tools	Diagnosis		
		Ping		
		Traceroute		
		NSLookup		
		System Log		
	Languages	• English	• Portuguese	
		• Russian	• Spanish	
		• Ukrainian	• French	
		• Simplified Chinese		
	Dashboard	Panel	• Internet Status	• Mesh Status
			• Devices Management	
• WAN Status			• LAN Status	
• WISP Status			• Wi-Fi Status	
• VPN Status			• System Version	
• DHCP Server Status				
Charts		• Mesh Topology	• Internet Speed	
		• WISP Speed	• Wi-Fi Speed	